



Pozzani Pure Water Plc
 Warwick Road
 Fairfield Industrial Estate
 Louth
 Lincolnshire LN11 0YB
 Telephone: 0845 165 1250
 Telephone: (01507) 608100
 Fax: (01507) 608090
 email:enquiries@pozzani.co.uk
 www.pozzani.co.uk

pozzani[®]
 Water treatment products

ECLIPSE AQUARIUS & MORITZ FREESTANDING WATER COOLERS WITH MULTI STAGE FILTRATION SYSTEM



Aquarius



Moritz

Benefits of using the Aquarius & Moritz water coolers and dispensers

- ☐ Provides your company with a constant supply of water that smells and tastes better than ordinary tap water
- ☐ Very low running costs - far cheaper than bottle coolers
- ☐ Option of a hot water tap for making hot drinks
- ☐ Simple to install and easy to use
- ☐ No bottle storage or heavy lifting required to change over empty bottles
- ☐ No drain required. Both freestanding water coolers have an integrated drip tray
- ☐ Fresh natural tasting water from our quality filtration systems. Choice of IX250 system (below left) or IX600 system (below right). More information overleaf

The point of use water cooler and dispenser is a convenient and cost effective way of providing a constant supply of filtered fresh water. Plumbed directly into the mains water supply, water is passed through an in-line filtration system, producing crystal clear fresh tasting water.

Features of the water coolers and filtration system

- ☐ **Hot Water Dispenser:** Optional
- ☐ **Cup Dispenser:** Optional
- ☐ **Stylish Designs:**
 - Aquarius:** Durable cabinet. The freestanding chiller is housed in a strong steel framed cabinet with coated metal and plastic panels.
 - Moritz:** Durable cabinet. In a modern 'cylinder style' with a stylish stainless steel finish
- ☐ **High pressure faucets**
- ☐ **Large removable drip tray:** The one-piece drip tray lifts out in seconds for easy sanitisation. It is moulded for durability and is dishwasher safe
- ☐ Pressure Vessel operation is designed for easy sanitisation (vessel can be opened and sanitized)
- ☐ **Comes with Four Stage Filtration System:** For removing organic chemicals, bad odours, tastes and reducing scale (see left)
- ☐ **Connection Kit:** Included - fits onto 15mm copper piping
- ☐ **Leak Prevention Device:** Optional

TECHNICAL SPECIFICATIONS

Models available	Aquarius	Moritz
Performance		
(Itrs of water/hour)	20 litres	20 litres
Hot Tank Capacity	1.5 litres	1.5 litres
Cold Tank Capacity	1.5 litres	1.5 litres
Weight	17 Kg	16Kg
Voltage	240 v AC	240 v AC
Power	600 Watt	600 Watt
Dimensions of unit	32cm(w) x 32cm(d) x 98cm(h)	30.5cm(w)x32cm(d)x92.5(h)
Cabinet	Polycarbonate Cabinet	Stainless Steel/ABS Cabinet
Option of cup dispenser	Yes - at extra cost	
Option of hot water dispenser	Yes - at extra cost	
Option of Leak Prevention Device	Yes - at extra cost	
Filter change interval	Every 6 months	
Connection kit	Included - to fit 15mm copper pipework	




IX250 system



IX600 system


IX250 Water Filtration System*

- ⊗ Externally fitted
- ⊗ Compact design - housing dimensions Height 25cm Diameter 9cm
- ⊗ Flowrate 1.5 litres per minute
- ⊗ Removes chlorine, dissolved organics, heavy metals, bacteria and suspended solids.
- ⊗ Easy to change cartridge procedure.
- ⊗ Cartridges lasts up to 6 months each.
- ⊗ Easy to install - no plumbing required. Simple to fit onto the cold water mains copper piping - fittings included.
Can also be installed on plastic tubing - additional fittings will be required.
- ⊗ Maximum input pressure - 7 bar (100 psi)
- ⊗ Technical help available

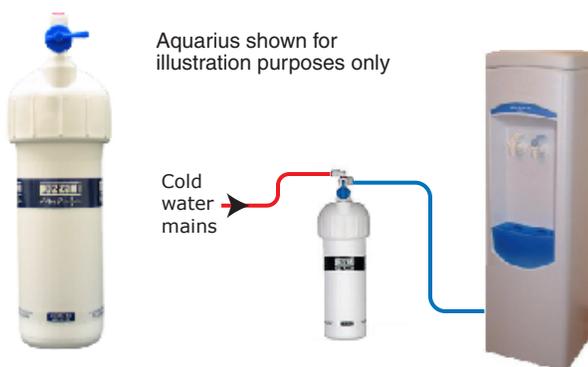

IX600 Water Filtration System

- ⊗ Externally fitted
- ⊗ Compact design - Housing dimensions Height 33cm Diameter 16cm
- ⊗ Flowrate 3 litres per minute
- ⊗ Different cartridge options available to remove various contaminants including chlorine, dissolved organics, heavy metals and suspended solids
- ⊗ Easy to change cartridge procedure
- ⊗ Cartridges last up to 6 months each
- ⊗ Easy to install - no plumbing required. Simple to fit onto the cold water mains copper piping - fittings included.
Can be also installed on plastic tubing - additional fittings will be required.
- ⊗ Maximum input pressure - 7 bar (100 psi)
- ⊗ Technical help available

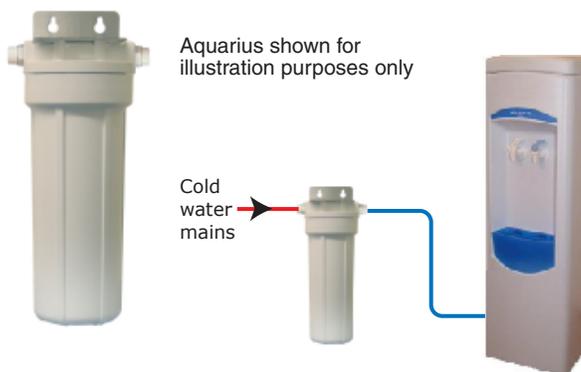

Cartridge options for the IX250 System

IX250	Carbon and ion exchange
IX250P	Carbon and ion exchange with anti scale
CA250	Chloramine (instead of chlorine) removal
CA250P	Chloramine (instead of chlorine) removal with anti scale
CX250	Carbon
CX250P	Carbon with anti scale
IX200	Carbon and ion exchange
IX200-LP	Carbon and ion exchange for low pressure areas
RIX250	Recyclable Carbon and ion exchange

Cartridge options for the IX600 System

IX600	General purpose and heavy metal removal
IX600P	General purpose, heavy metal removal and anti scale
BC600	General purpose and fluoride removal
CA600	Chloramine (instead of chlorine) removal
CA600P	Chloramine (instead of chlorine) removal and anti scale
DSS-C10	Absolute 1 micron filter
TX600	Taste and odour filter

*Not recommended for user groups of over 15 people

Moritz and IX600 shown for illustration purposes only.
Cooler can be substituted with the Aquarius and the filtration system with the IX250



Leak Controller

The optional Leak Controller priced £30.00 + VAT automatically cuts off the mains supply feed to the cooler and sounds an audible alarm in the event of a leak caused through device malfunction, physical damage or someone leaving the tap running without realising.

Note: Some insurance companies for commercial customers now insist such equipment is protected with a flood protection device such as this.