

# IX600 CARTRIDGE FITTING INSTRUCTIONS & PERFORMANCE DATA

## FILTER CHANGING INSTRUCTIONS

### NOTE

An activated carbon filter will contain a small amount of carbon 'fines' and with any newly fitted cartridge it is recommended that you flush with sufficient water to remove any black powdery particles before using the filtered water.

### STEP 10

Re-connect the filter assembly as per steps 5 to 8 and check once more for any leaks.

### STEP 9


If leaks are evident, repeat steps 1 to 4 and once filter bowl has been removed, remove the 'O'-ring gasket from its groove at the top of the bowl and gently wipe it clean. If damage is evident, or if the 'O'-ring is crimped, contact your local dealer for a replacement. If the 'O'-ring appears OK, lubricate it lightly with petroleum jelly and gently refit it into the groove in the filter bowl.

### STEP 8

Run water through the unit for a few minutes and check for leaks.

### STEP 1

Turn off water supply to filter.

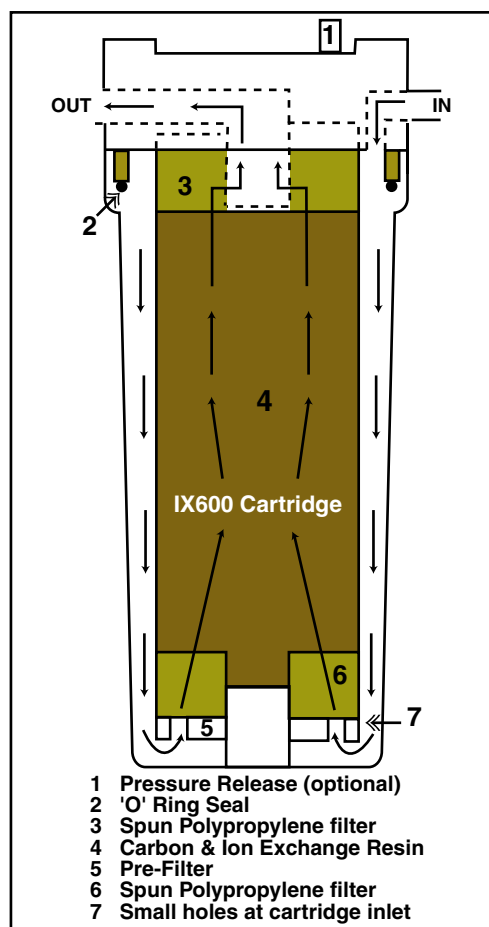

### STEP 2

Release water pressure by opening the filter tap on the sink or alternatively press the red pressure release button situated above the filter bracket.

### STEP 3

Unscrew the filter housing by turning right to left (clockwise).  
\* filter spanner is available from Pozzani.

### STEP 4

Remove used filter from filter bowl.

### STEP 5

The new filter has a series of holes around one end. **Place the filter in the filter bowl ensuring the end of the filter containing the holes sits downward in the filter bowl (at the bottom).**

### STEP 6

Check that 'O'-ring seal is located in the filter bowl groove.  
Replace the filter bowl by screwing anti-clockwise and nip tight.

### STEP 7

Turn on the water supply slowly, to allow the filter to fill with water. Depress the pressure release button (if present), to release any trapped air from within the unit.

## TYPICAL PERFORMANCE %

ION EXCHANGE (CATION)		CARBON	
Lead	95%	Chlorine	99%
Aluminium	90%	Dissolved organic matter: e.g.	85-85%
Copper	90%	Pesticides, Herbicides,	
Cadmium	90%	Fertilisers, Oil Residues,	
Iron	95%	THM's, TME's, PCB's	



Pozzani Pure Water Plc  
Warwick Road  
Fairfield Industrial Estate  
Louth  
Lincolnshire LN11 0YB  
Telephone: (01507) 608100  
Fax: (01507) 608090  
email:enquiries@pozzani.co.uk  
www.pozzani.co.uk

# NO. 10 (10") & NO. 20 (20") CARTRIDGE FITTING INSTRUCTIONS

### FILTER CHANGING INSTRUCTIONS

#### NOTE

An activated carbon filter will contain a small amount of carbon 'fines' and with any newly fitted cartridge it is recommended that you flush with sufficient water to remove any black powdery particles before using the filtered water.

#### STEP 10

Re-connect the filter assembly as per steps 5 to 8 and check once more for any leaks.

#### STEP 9


If leaks are evident, repeat steps 1 to 4 and once filter bowl has been removed, remove the 'O'-ring gasket from its groove at the top of the bowl and gently wipe it clean. If damage is evident, or if the 'O'-ring is crimped, contact your local dealer for a replacement. If the 'O'-ring appears OK, lubricate it lightly with petroleum jelly and gently refit it into the groove in the filter bowl.

#### STEP 8

Run water through the unit for a few minutes and check for leaks.

#### STEP 1

Turn off water supply to filter.

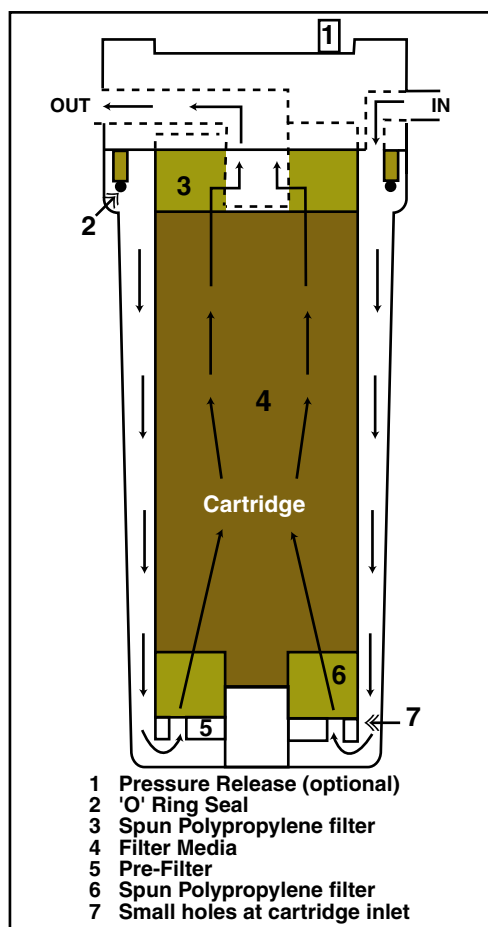

#### STEP 2

Release water pressure by opening the filter tap on the sink or alternatively press the red pressure release button situated above the filter bracket.

#### STEP 3

Unscrew the filter housing by turning right to left (clockwise).  
\* filter spanner is available from Pozzani.

#### STEP 4

Remove used filter from filter bowl.

#### STEP 5

The new filter has a series of holes around one end. **Place the filter in the filter bowl ensuring the end of the filter containing the holes sits downward in the filter bowl (at the bottom).**

#### STEP 6

Check that 'O'-ring seal is located in the filter bowl groove.  
Replace the filter bowl by screwing anti-clockwise and nip tight.

#### STEP 7

Turn on the water supply slowly, to allow the filter to fill with water. Depress the pressure release button (if present), to release any trapped air from within the unit.



Pozzani Pure Water Plc  
Warwick Road  
Fairfield Industrial Estate  
Louth  
Lincolnshire LN11 0YB  
Telephone: 0845 165 1250  
Fax: 0845 165 1251  
email:enquiries@pozzani.co.uk  
www.pozzani.co.uk